


FREQTECH[®]
your first and second source

FT26A


Package: glass

rohs compliant

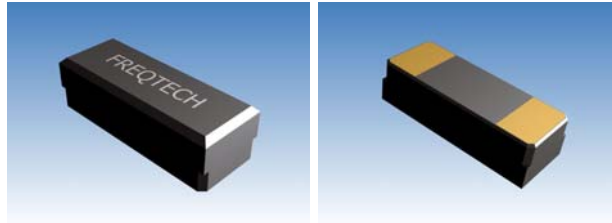

Electrical specifications

Parameter	Condition	Availability	Standard
Frequency range			32,7680kHz
Frequency stability	@ +25°C	+/-20 ~ +/-50 ppm	+/- 30 ppm
Temperature tolerance	Over operating temperature		-0,035 ppm/(Δ°C) ²
Operating temperature range		-40 ~ +85 °C	-20 ~ +70 °C
Storage temperature range			-40 ~ +85 °C
Shunt capacitance			1,7pF
Motional capacitance			0,0029pF
Load capacitance		7 ~ 12,5 pF	12,5pF
Drive level			1μW
Aging	@ +25°C, per year	-3,0 ~ +3,0ppm	

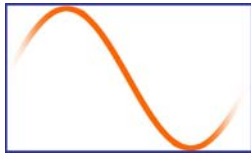


FREQTECH[®]
your first and second source

FT26A

Package: glass

rohs compliant

Mechanical dimensions (mm)

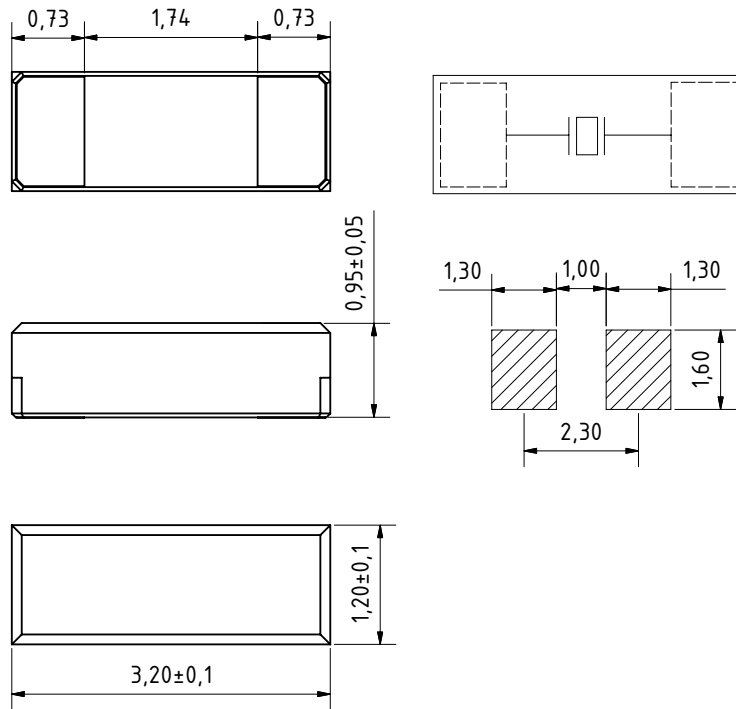

Ordering key

Type	- frequency	/ load capacitance	- frequency stability	/ operating temperature	
FT26A	value in kHz	value in pF	value in ppm	27 = -20°C~+70°C	
				48 = -40°C~+85°C	