


**SPECIFICATION**

Frequency	1,0~100,0 MHz	
Supply Voltage	1,8 V	1,8 V
Current Consumption	15mA max.	
Operating Temperature Range	Standard, Code 27 Available, Code 48	<b>OSCILLATOR</b>
	-20°C~70°C	2,5 x 2 MM
	-40°C~85°C	
Storage Temperature Range	-55°C~125°C	
Frequency Stability	See Table	
Output Load Condition	CMOS 15 pF	
Symmetry	45% to 55%	
Output Rise & Fall Time	5 ns max.	
High & Low Output Voltage	90% Vdd min. 10% Vdd max.	
Oscillation Start Up Time	5 ms max.	
Aging	±3 ppm max.	
Phase Jitter (12 kHz~20 MHz)	1 ps max.	
Period Jitter (Peak to Peak)	±50 ps max.	

**TABLE**

S: Standard ; A: Available

Temp. Code	Temp. / ppm	± 20	± 25	± 50	± 100
27	20~70°C	A	A	S	-
48	40~85°C	-	A	A	S

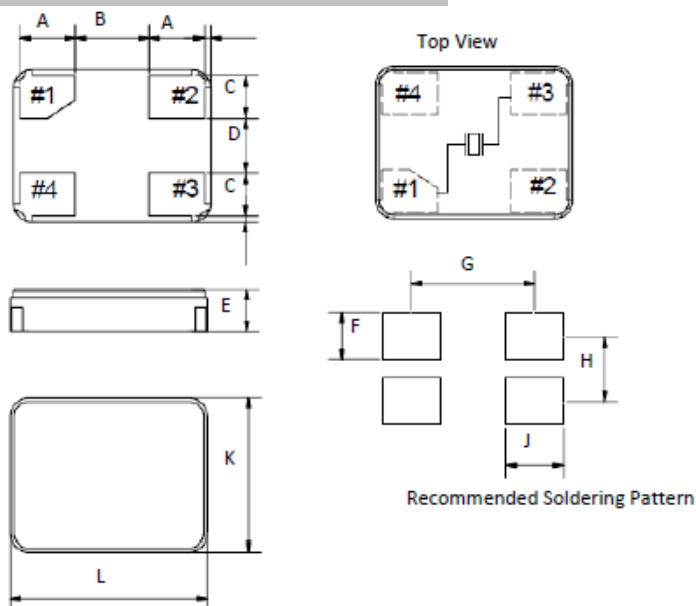
**CONNECTION**

<b>Pin 1:</b> NC or EN/DIS (Tri-State)	<b>Pin 3:</b> Output
<b>Pin 2:</b> GND	<b>Pin 4:</b> Vdd

**ORDERING KEY**

Example: FT29B-14,74560/50-15/27

Type	- Frequency	/Frequency Stability	-Output Load	/Temp. Code
FT29B	Value in MHz	Value in ppm	15 pF	27 48

**MECHANICAL DIMENSIONS (MM)**


A	0,75
B	0,9
C	0,6
D	0,65
E	0,85
F	0,85
G	1,7
H	1,35
J	1,0
K	2,0±0,1
L	2,5±0,1