


FT6B

3,3V SMD Oscillator – package: ceramic base with metal cover
rohs compliant

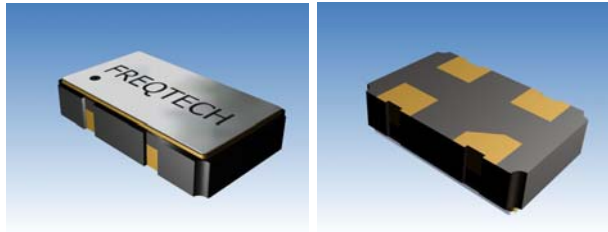


Electrical specifications

Parameter	Condition	Availability	Standard
Frequency range		1,60 ~ 125,0 MHz	
Frequency stability	@ -20°C ~ +70°C @ -40°C ~ +85°C	+/- 25 ~ +/- 50 ppm +/- 50 ~ +/- 150 ppm	+/- 50 ppm +/- 100 ppm
Operating temperature range		-40 ~ +85 °C	-20 ~ +70 °C
Storage temperature range			-55 ~ +125 °C
Power supply voltage			3,3 V +/-10%
Aging (1 st year)	@ 25°C +/-3°C		+/- 5,0 ppm
Supply current	1,60~9,999 MHz 10,0~34,99 MHz 35,0~49,99 MHz 50,0~125,0 MHz		8 mA max. 10 mA max. 25 mA max. 35 mA max.
Output symmetry	@ ½ Vdd		40/60% option: 45/55%
Rise time	10%Vdd ~ 90% Vdd		7 ns max.
Fall time	90% Vdd ~ 10% Vdd		7 ns max.
Output load	HCMOS load	15 ~ 50 pF	15pF
Start up time			10 ms max.
Pin1, tristate function		Pin 1=H or open / output active at Pin 3 Pin 1=L...high impedance at Pin 3	

Pin connection


Pin	Connection	Pin	Connection
1	tristate / NC	3	Output
2	GND	4	3,3V dc



FT6B

3,3V SMD Oscillator – package: ceramic base with metal cover
rohs compliant

Mechanical dimensions (mm)

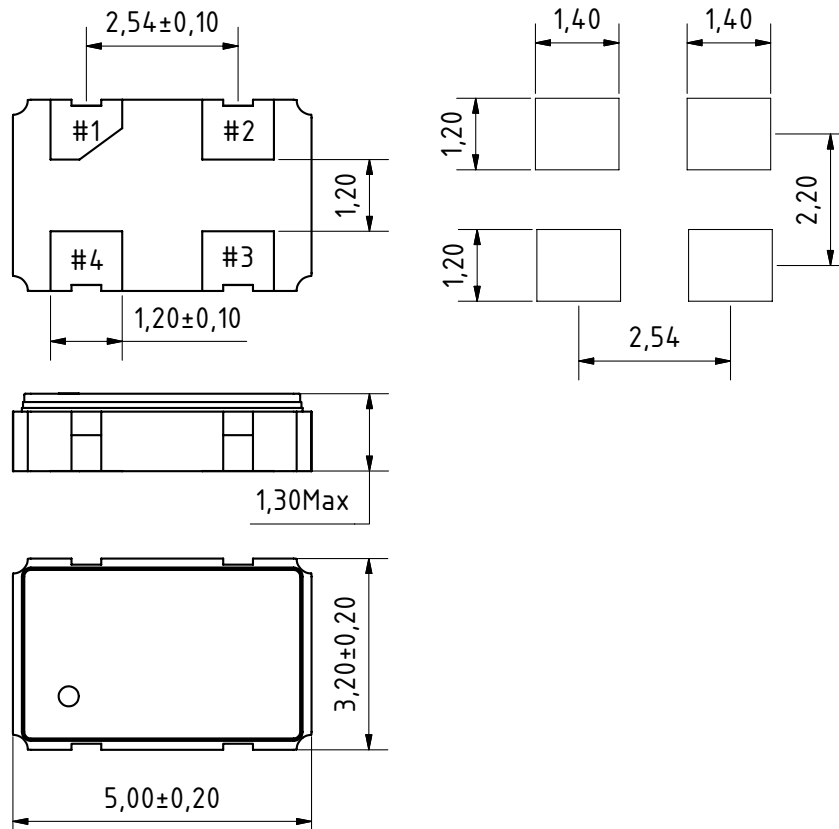

Ordering key

Type	- frequency	/ frequency stability	- output load	/ operating teperature	/ option
FT6B	value in MHz	value in ppm	value in pF	27 = -20°C~+70°C	s45 = symmetry 45/55%
		s for series		48 = -40°C~+85°C	